


Large Commercial Air Curtains - CA10HL, CA15HL & CA20HL

A welcoming curtain of warmth for extra tall/wide double doorways in shops, hotels, offices and other commercial premises.




Colour Selector

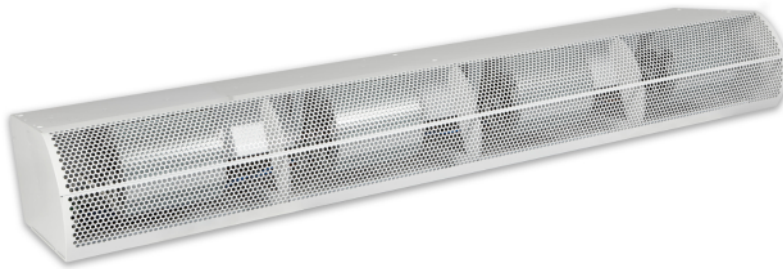

JET BLACK



SLATE GREY



WHITE



ACMC



ACTS



HE8408

- 8/12kW, 12/18kW or 16/24kW rating, selectable at installation
- Suspended mounting
- Supplied with electronic controller (ACMC), external temperature sensor (ACTS) and 10m RJ45 cable
- 415 Volt 3 phase 50Hz
- Fan only setting for air circulation
- 8 heat settings, 8 fan speeds with supplied ACMC
- ACTS must be used in conjunction with ACMC
- Optional simple mechanical remote switch HE8408 available
- 2 heat settings, 2 fan speeds with remote switch
- Compatible with Building Management Systems via MODBUS Protocol
- Multiple air curtains can be easily interconnected using CAT5/CAT6 RJ45 networking cable to resemble a continuous unit
- External temperature sensor can be used indoors or outdoors which enables the electronic controller to optimise the fan speed and heat output to create an efficient optimal barrier and climate protection.
- Safety monitoring feature: The feature will detect and display the nature of the fault on the display screen of ACMC controller. (If ACMC controller not used, the LED indicator light located under the heater cover will flash indicating the nature of the fault).
- Electronic overheat and fault protection.
- Visual fault indication
- Easy maintenance
- Automatic safety cut-out for thermal overload protection
- Finished in white, grey or black

Dimensions (mm) & Weight (kg):

Model No.	Min / Max kW	Depth	Width	Length	Weight	Max dBA Full Speed	Max Mounting Height (m)
CA10HL	8 / 12	270	480	1029	62	60	4
CA15HL	12 / 18	270	480	1536	77	61	4
CA20HL	16 / 24	270	480	2049	93	62	4