

2026 *heat*

ELECTRIC HEATING SOLUTIONS
For domestic, commercial & industrial environments



01646 692172

www.consortepl.comsales@consortepl.com



BFH2E



DF2ESL

WHAT'S NEW

BFH2E

Our new BFH2E is a metal-bodied downflow fan heater designed for efficient, localised heating in kitchens, bathrooms, and washrooms. This model offers improved control and comfort without the need for a separate controller. Ideal for new builds and refurbishments, the BFH2E is a standalone solution that simplifies installation and enhances energy management - making it a smart choice for specifiers and wholesalers alike. Find out more on page 15.

DF2ESL

Say hello to the DF2ESL Heatflow Downflow Fan Heater, designed to deliver rapid, energy-efficient heating for bathrooms, kitchens, and compact spaces. With a powerful adjustable heat output of 1kW or 2kW, it ensures fast and effective warmth whenever you need it. It's compatible with any Consort wireless controllers, allowing seamless customisation of heating schedules. For more details, go to page 16.

CFH3

Introducing the CFH3 Commercial Fan Heater, the perfect solution for workshops, garages, and other commercial spaces that require reliable, directional heating. Boasting a 3kW power output, this heater delivers instant warmth with 1 fan speed and 3 heat settings, plus a fan-only mode for air circulation. Explore more on page 19.



CFH3



HE8326RX, HE7433RX

We've launched two wireless-controlled air curtains, designed for tall, double-width doorways in commercial spaces such as shops, hotels, and offices. These 6kW and 9kW air curtains can be operated remotely via our advanced wireless controllers (CRXSL, HRXSL or LC), offering seamless multi-heater control. With two heat settings, two fan speeds, and a fan-only mode, they provide flexible climate management. They are also compatible with the Building Management Systems (BMS). To know more about these air curtains, turn to page 23.

CRXSLWIFI

Discover the CRXSLWIFI Wireless Controller, the ultimate smart heating solution with WiFi connectivity. Seamlessly pair it with RX and SL heaters and unlock full control via the Consort Connect app, enabling remote programming, energy monitoring, and detailed consumption statistics for the past day, week, month, or year. With 5 operating modes, open-window detection, a 7-day timer, and frost protection settings, this mains-powered controller combines efficiency and convenience in a sleek, wall-recessed design. Turn to page 35 for more details.

CRXSL

Introducing the CRXSL Wireless Controller, the smart, energy-saving solution for managing RX and SL heaters. This sleek, mains-powered controller features a large backlit LCD display for effortless programming, offering 7-day heating schedules with 6 temperature adjustments per day. With intelligent open-window detection, battery backup, and 5 versatile operating modes, it ensures optimal comfort and efficiency. Designed for wall recessing, the CRXSL combines style and practicality for a seamless heating experience. Find out more on page 40.

Welcome to Consort Claudgen's Heat brochure

At Consort Claudgen, we take pride in being a trusted name in electric heating solutions, with a legacy of delivering quality, reliability, and innovation. For decades, we have been at the forefront of designing safe, energy-efficient, and stylish heating products that cater to diverse needs across domestic, commercial and industrial environments.

Why Consort Claudgen is the Trusted Choice for Heating Solutions?

Uncompromising Quality

Our products are crafted to the highest standards, ensuring durability, reliability, and long-term value.

Sustainability Commitment

We are proud to offer products that align with LOT 20 regulations, delivering superior energy efficiency and reducing environmental impact.

Innovative Technology

From WiFi-enabled heaters to intelligent controls, we embrace advanced technologies that enhance user convenience and optimise energy usage.

Comprehensive Range

Whether you need low surface temperature heaters for safety, radiant ceiling tile heaters for discreet comfort, or stylish towel rails for modern bathrooms, we have you covered.

This brochure has been thoughtfully created to guide you in selecting the perfect heating solutions tailored to your specific requirements.

From residential spaces to demanding commercial applications, our wide range of products is designed to deliver comfort, efficiency, and sustainability.

	Page
Consort Connect app	05
Wi-Fi enabled heaters	06
Wi-Fi enabled heaters with occupancy sensor	07
Panel heaters	08
Low surface temperature heaters	10
CSL convector heaters & convector guard	13
Wall mounted fan heaters	14
Downflow fan heaters	15
Radiant ceiling tile heaters	16
Ceiling tile heaters	17
Towel rails	18
Plinth heaters	18
Commercial fan heaters	19
Air curtains	22
Air curtains summary	28
Radiant heaters	30
Softstart controls	31
Ceramiczone radiant heaters	32
Frostfighter utility heaters	33
110V Portable fan heaters	34
Sanitary incinerators	34
Wireless controllers & E-RF heaters	35
Receiver units & range extender	45
Installation planning	46

Consort Connect App



Take Control of Your Comfort and Save Energy

Stay in charge of your heating anytime, anywhere with our WiFi-controlled heating solutions.

Download the FREE Consort Connect App and start managing your heating effortlessly from your smartphone.



Consort Connect app features:



Complete control via smartphone / tablet.



4 modes - Frost, Automatic, Manual and Boost.



No hub required. Heaters connect directly to WiFi (only 2.4GHz, not 5GHz WiFi or WiFi set to automatic settings).



Open window detection.




All RX & SL Consort heaters can be controlled by the app via CRXSLWIFI* wireless controller.



Occupancy sensor & self-learning Automatic mode (only available in 'MWIFI' heaters and SLPBWIFI).



All SL Consort heaters can be controlled by the app via SLPBWIFI* wireless controller.



View energy usage of all connected heaters in the last day, week, month and year.

* The SLPBWIFI and CRXSLWIFI wireless controller connects to Consort Connect app which provides the programming and energy saving features, including Boost.

WI-FI-ENABLED HEATERS

PLE-WIFI, PLSTiE-WIFI & LSTE-WIFI



Smart, Efficient and User-Friendly

Take control of your comfort with Consort's Wi-Fi-enabled heaters, featuring the latest in smart heating technology. Designed to combine efficiency, convenience, and modern aesthetics, these heaters offer a versatile solution for any home or commercial space.

Key Features

- Adjust settings from your smartphone or tablet, anywhere, anytime
- Monitor energy consumption for the day, week, month, or year to maximise efficiency
- 7-day timer with up to 24 heating periods per day
- 4 modes (Programme, Boost, Setback, and Manual)
- Open window tracking
- Intelligent fan control
- Setback temperatures ensure energy savings
- Lockable controls (including optional control panel locking kit, PLK1)
- Splash-proof to IP24
- Automatic safety cut-out
- Quiet operation with strengthened grilles for longevity

Models

- PLE-WIFI: Slim, versatile heaters perfect for everyday use. Power options: 0.5kW – 2kW.
- PLSTiE-WIFI & LSTE-WIFI: Low surface temperature models for safety-critical environments, ideal for schools and healthcare facilities. Maximum surface temperature of 43°C to comply with NHS Estates Health Guidelines Notes.

Safety monitoring & intelligent fan control features in PLSTiE-WIFI heaters



In the unlikely event of a fault, the safety monitoring system helps prevent high surface temperatures. The heater's light will flash to indicate the nature of the fault.



The fan automatically adjusts its speed based on the room temperature and heat output. This ensures warm airflow and prevents cold drafts.

Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight
PLE050WIFI	0.5	430	93	442	4.0
PLE075WIFI	0.75	430	93	442	4.0
PLE100WIFI	1	430	93	614	5.0
PLE125WIFI	1.25	430	93	720	6.0
PLE150WIFI	1.5	430	93	720	6.0
PLE200WIFI	2	430	93	852	6.5

Model No.	kW	Height	Depth	Width	Weight
PLSTi050EWIFI	0.5	430	93	506	4.5
PLSTi075EWIFI	0.75	430	93	506	4.5
PLSTi100EWIFI	1	430	93	640	6.0
PLSTi150EWIFI	1.5	430	93	892	8.0

Model No.	kW	Height	Depth	Width	Weight
LST500EWIFI	0.5	430	93	832	6.3
LST800EWIFI	0.8	430	93	1195	8.7

Wi-Fi-Enabled Heaters with Occupancy Sensor: PLE-MWIFI & LSTE-MWIFI

PLE-MWIFI



LSTE-MWIFI



Smart Heating with Occupancy Sensing

Maximise efficiency with Consort's Wi-Fi-enabled heaters with built-in occupancy sensors. These intelligent heaters learn your schedule, automatically adjusting warmth based on detected or predicted room usage - providing comfort when needed and conserving energy when not.

Key Features

The 'MWIFI' heaters have the same features and functions as the 'WIFI' heaters on page 6, however, they offer the added benefits of:

- In-built occupancy sensors.
- Self-learning control ability utilising occupancy and temperature sensors. Detects room occupancy and adapts heating schedules for optimised efficiency.

Models

- PLE-MWIFI: Panel Heaters with WiFi & Occupancy Sensor (0.5kW – 2kW)
- LSTE-MWIFI: Low Surface Temperature Panel Heaters with WiFi & Occupancy Sensor (0.5kW & 0.8kW). Ideal for schools and healthcare facilities. Maximum surface temperature of 43°C to comply with NHS Estates Health Guidelines Notes.

Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight
PLE050MWIFI	0.5	430	93	442	4.0
PLE075MWIFI	0.75	430	93	442	4.0
PLE100MWIFI	1	430	93	614	5.0
PLE125MWIFI	1.25	430	93	720	6.0
PLE150MWIFI	1.5	430	93	720	6.0
PLE200MWIFI	2	430	93	852	6.5
Model No.	kW	Height	Depth	Width	Weight
LST500EMWIFI	0.5	430	93	832	6.3
LST800EMWIFI	0.8	430	93	1195	8.7

PANEL HEATERS

Electronic 7-day timer heaters: PLE & PVE

Reliable, efficient, and easy to control - Consort's PVE & PLE panel heaters offer precise temperature management with an electronic 7-day timer.

PLE Electronic 7-day timer



PVE Electronic 7-day timer with battery backup



Key Features

- 7-day timer with 6 heating periods per day for customised warmth
- Battery backup for real-time clock
- Open window detection prevents heat waste
- Electronic child lock
- Optional control panel locking kit, PLK1, available for PLE heaters to prevent tampering
- Slim, stylish design with strengthened grilles (PLE models) for extra durability
- IP24 splash-proof rating for damp areas
- Snap-on wall bracket for easy mounting and decorating

Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight
PLE050	0.5	430	93	442	4.0
PLE075	0.75	430	93	442	4.0
PLE100	1	430	93	614	5.0
PLE125	1.25	430	93	720	6.0
PLE150	1.5	430	93	720	6.0
PLE200(SS)	2	430	93	852	6.5

Note: 'SS' denotes stainless steel finish.

Explore more at www.consortepl.com



Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight
PVE050	0.5	426	98	428	4.0
PVE075	0.75	426	98	428	4.0
PVE100	1	426	98	568	5.0
PVE150	1.5	426	98	703	6.0
PVE200	2	426	98	768	6.5

Wireless controlled: PSL

Efficient, stylish, and easy to control - Consort's wireless panel heaters provide flexible heating solutions for modern spaces.

Key Features

- 0.5kW to 2kW rating
- Compatible with any Consort wireless controller
- Slim and contemporary design, perfect for homes and commercial spaces
- Very quiet operation and strengthened grilles for added durability
- Snap-on wall bracket for quick setup, cleaning, and decorating
- IP24 splash-proof protection for damp areas
- Automatic safety cut-out



Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight
PSL050	0.5	430	93	442	4.0
PSL075	0.75	430	93	442	4.0
PSL100	1	430	93	614	5.0
PSL125	1.25	430	93	720	6.0
PSL150	1.5	430	93	720	6.0
PSL200	2	430	93	852	6.5

Note: Wireless controllers to be purchased separately.



LOW SURFACE TEMPERATURE HEATERS

Electronic 7-day timer heaters: PLSTiE, CN2MLSTiE & LSTE

PLSTiE



LSTE



CN2MLSTiE



All low surface temperature heaters are designed for safety, efficiency, and comfort, with a maximum surface temperature of 43°C which complies with NHS Estates Health Guidance Notes.

Key Features

- 7-day timer with 6 heating periods per day for scheduled heating
- Timer battery backup
- Open window detection prevents heat waste
- 15-minute Boost for quick warmth when needed
- Quiet and easy operation
- Strengthened grilles (PLSTiE & CN2MLSTiE models)
- Electronic child lock
- Optional PLK1 control panel lock to prevent tampering (for PLSTiE & LSTE)

Safety monitoring & intelligent fan control features in PLSTiE & CN2MLSTiE heaters



In the unlikely event of a fault, the safety monitoring system helps prevent high surface temperatures. The heater's light will flash to indicate the nature of the fault.



The fan automatically adjusts its speed based on the room temperature and heat output. This ensures warm airflow and prevents cold drafts.

Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight	dBA
PLSTi050E	0.5	430	93	506	4.5	30
PLSTi075E	0.75	430	93	506	4.5	30
PLSTi100E	1	430	93	640	6.0	31
PLSTi150E	1.5	430	93	892	8.0	33
PLSTi150SSE	1.5	430	93	892	8.0	33

Note: 'SS' denotes stainless steel finish. dBA readings are taken 3 metres from the heater and at ambient temperature of 20°C.

Model No.	kW	Height	Depth	Width	Weight
LSTE500E	0.5	430	93	832	6.3
LSTE800E	0.8	430	93	1195	8.7

Model No.	kW	Height	Depth	Width	Weight	dBA
CN2MLSTiE	2	360	143	750	8.0	35

Note: dBA readings are taken 3 metres from the heater and at ambient temperature of 20°C.

Wireless controlled: PLSTiSL & CSL LST/MLST

PLSTiSL



CSL LST / MLST



Key Features

- Compatible with any Consort wireless controllers
- Splash-proof to IP24 for use in bathrooms and other damp areas (PLSTiSL)
- Incorporates EC motor for improved energy efficiency (PLSTiSL)

Models

- PLSTiSL: 0.5kW to 1.5kW slimline fan heaters with intelligent fan control and strengthened grille.
- CSL: 1kW and 2kW fan heaters with optional mesh grille for added protection.

Safety monitoring & intelligent fan control features in PLSTiSL heaters



In the unlikely event of a fault, the safety monitoring system helps prevent high surface temperatures. The heater's light will flash to indicate the nature of the fault.



The fan automatically adjusts its speed based on the room temperature and heat output. This ensures warm airflow and prevents cold drafts.

Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight	dBA
PLSTi050SL	0.5	430	96	506	4.5	30
PLSTi075SL	0.75	430	96	506	4.5	30
PLSTi100SL	1	430	96	640	6.0	31
PLSTi150SL	1.5	430	96	892	8.0	33

Note: dBA readings are taken 3 metres from the heater and at ambient temperature of 20°C.

Model No.	kW	Height	Depth	Width	Weight	dBA
CSL1LST	1	360	130	590	5.5	35
CSL2LST	2	360	143	750	8.0	40
CSL1MLST	1	360	130	590	5.5	35
CSL2MLST	2	360	143	750	8.0	40

Note: Wireless controllers to be purchased separately.

Free standing 1kW LST fan heater: CN1MLSTFS

Key Features

- 1kW rating with on/off switch
- Mesh grille to prevent objects from being dropped into the heater
- Tilt switch and automatic cut-off
- Fan only setting for air circulation
- Variable thermostat with frost protection setting
- Screw lockable control access panel
- Quiet operation ideal for care settings and offices
- Free standing with feet supplied



Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight	dBA
CN1MLSTFS	1	420	160	590	5.5	35

LST Toweldry towel rails: TRF30

Key Features

- Adjustable wall brackets
- Very economical to run
- Fitted with 1m of supply cable
- Double insulated Class II appliance, which eliminates the need for supplementary bonding
- IP24 rated
- Finished in white



Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight
TRF30	0.03	425	86	465	1.5

CSL CONVECTOR HEATERS & CONVECTOR GUARD

Wireless controlled: CSL2SC & CSL2SR

CSL2SC is designed to reduce the temperature rise above the heater allowing it to be installed beneath cable trunking.

CSL2SC



CSL2SR



Key Features

- 2kW rating
- Compatible with any Consort wireless controllers
- One controller can operate multiple SL heaters
- Virtually noiseless operation
- Full-length wall bracket for ease of installation
- Automatic safety cut-out
- CSL2SC can be mounted 300mm or more below cable trunking
- CSL2SR has a built-in heat deflector to reduce wall staining and delamination

Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight
CSL2SC	2	360	130	590	3.9
CSL2SR	2	360	130	590	3.9

Note: Wireless controllers to be purchased separately.

Wall-mounted convector guard: CG2N

Ideal where extra protection is required for wall mounted convector heaters - for example, heavy traffic corridors, classrooms, workshops etc.

Key Features

- Designed to fit a wide range of 2kW convector heaters
- Provides extra mechanical protection and safety
- Can be retrofitted
- Reduces RF range on SL heaters
- Finished in white



Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight
CG2N	-	478	156	653	3.5

WALL MOUNTED FAN HEATERS

Electronic 7-day timer: WMH3E & HE6137E

The WMH3E is a sleek and stylish heater ideal for installations such as open plan offices or large conservatories. The HE6137E heater is a compact and robust heater which makes it a perfect choice where space is limited.

WMH3E Chelsea



HE6137E Flowzone



Key Features

- 3kW rating
- 7-day programme, 6 heating periods per day
- Quiet operation
- Open window detection
- Battery backup for real-time clock
- 4 operating modes: Programme, Boost, Setback & Manual
- Fan only setting for air circulation
- Frost protection setting
- Electronic child lock for safety



Safety monitoring feature

The heater will detect and show the nature of the fault on the display screen.

Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight	dBA
WMH3E	3	260	120	584	4.5	37
HE6137E	3	260	115	500	5.7	37

Wireless controlled high level fan heaters: HE7010SL & HE7010RX

Perfect for shops, offices and restaurants, indeed anywhere requiring discreet background heat. The heaters are quiet, economical in use and discreet once installed.

Key Features

- 3kW rating
- All RX and SL heaters are compatible with advanced single zone controllers*
- SL controllers** are compatible with SL heaters only.
- Quiet operation
- Fan only setting for air circulation (for RX model)

* Advanced single zone controllers: CRXSL, CRXSLWIFI, HRXSL and LC controllers.

** SL controllers: SLPBWIFI, SLPB, SLVT, SLVTB and SLPBWP controllers.

Note: Wireless controllers to be purchased separately.



Safety monitoring feature

The heater's light will flash to indicate the nature of the fault.

Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight	dBA
HE7010SL / HE7010RX	3	210	115	485	4.0	44



Note: 200mm clearance from ceiling required.

Explore more at www.consortepl.com

DOWNFLOW FAN HEATERS

Metal bodied: BFH2E

These are ideal for bathrooms, kitchens and areas requiring localised, controllable heat. The BFH2E features a 7-day programme, 6 temperature settings per day, comfort and setback temperature/frost protection settings and automatic overheat safety cut-out.

Key Features

- Heating capacity: 1kW or 2kW (set by the user)
- Up to 2kW heat output for fast heating
- Digital variable thermostat
- 7-day programme/6 temperature settings per day
- Open window detection
- Battery backup for real-time clock
- 4 operating modes
- Copy day function
- Child lock feature
- Reduces heat output to 1kW when approaching target temperature
- Automatic safety cut-out
- Can set temperatures in degrees Celsius or Fahrenheit
- Large LCD
- Fitted with 0.7m cable
- Finished in white



Safety monitoring feature

The heater will detect and show the nature of the fault on the display screen.

Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight
BFH2E	2	170	90	330	2.0

With 7-day timer: DF2E

The new Consort DF2E Heatflow is a downflow fan heater with a digital variable thermostat. It features comfort and setback temperature/frost protection settings. It provides rapid warmth and an adjustable heat output (1kW or 2kW).

Key Features

- Heating capacity: 1kW or 2kW (set by the user)
- Up to 2kW heat output for fast heating
- 7-day programme/6 temperature settings per day
- Open window detection
- Battery backup for real-time clock
- 4 operating modes
- Child lock feature
- Reduces heat output to 1kW when approaching target temperature
- Automatic safety cut-out
- Double insulated Class II appliance



Safety monitoring feature

The heater will detect and show the nature of the fault on the display screen.

Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight
DF2E	1 or 2 (set by the user)	244	124	257	1.5

Wireless controlled with 7-day timer: DF2ESL

The new Consort DF2ESL Heatflow is a downflow fan heater with a digital thermostat. It features heating control options with compatible wireless controllers and automatic overheat safety cut-out. It provides rapid warmth and an adjustable heat output (1kW or 2kW).

Key Features

- Up to 2kW heat output for fast heating
- Digital thermostat
- Child lock feature
- Can set temperatures in degrees Celsius or Fahrenheit
- Compatible with any Consort wireless controller
- Double insulated Class II appliance



Safety monitoring feature

The heater will detect and show the nature of the fault on the display screen.

Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight
DF2ESL	1 or 2 (set by the user)	244	124	257	1.5

Note: Wireless controllers to be purchased separately.

RADIANT CEILING TILE HEATERS

Wireless controlled: RCT250SL

The radiant ceiling tile heaters can be installed “invisibly” in a 600x600mm ceiling tile system or direct to a ceiling offering each office, showroom or corridor the maximum floor and wall space. With the integrated mounting system, the panels are easy to fit within any type of ceiling.

Key Features

- 250W rating
- Compatible with any Consort wireless controller
- Can be installed in a ceiling tile system or directly onto a ceiling using supplied brackets
- Insulated to reduce heat transfer to the ceiling
- Easy to clean
- Silent operation
- Optimum mounting height: 2.5m



Note: A 500W rating is also available. Please check with our Sales team for more details.

Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight
RCT250SL	0.25	590	40	590	4.7

Note: Wireless controllers to be purchased separately.

CEILING HEATERS

Surface ceiling fan heaters are suitable for supermarket and showroom areas or where heat is required locally. They are designed to be suspended via its integral anchorage points and with a completely enclosed housing ensuring ease of installation. Recessed ceiling heaters are designed for discreet positioning in a suspended 600mm standard ceiling panel. They are ideal to heat areas where wall and floor space is at a premium such as shops and offices.

Surface Ceiling Heaters: HE7237, HE7247 & HE7267



Recessed Ceiling Heaters: HE7230, HE7245 & HE7260



RX Ceiling Fan Heaters

- Compatible with advanced single zone controllers*
- Fan only setting for air circulation
- Wider operating range
- Quiet operation
- Sealed heater box for improved energy efficiency
- Will fit shallow 210mm recess
- LED indicator light

SL Ceiling Fan Heaters

- Available in 3kW only
- Compatible with any Consort wireless controller
- Quiet operation
- Sealed heater box for improved energy efficiency
- Will fit shallow 210mm recess
- LED indicator light.

* Advanced single zone controllers: CRXSL, CRXSLWIFI, HRXSL and LC controllers.

Note: Wireless controllers to be purchased separately.



Safety monitoring feature for RX & SL ceiling fan heaters

The heater's light will flash to indicate the nature of the fault.

Dimensions (mm) and weight (kg)

Model No.	Type	kW	Depth	Width	Length	Weight	dBa	Optimum Ceiling Height (m)
HE7230RX	Recessed	3	175	595	595	7.5	46	3.0
HE7245RX	Recessed	4.5	175	595	595	7.5	47	3.3
HE7260RX	Recessed	6	175	595	595	10.5	48	3.6
HE7237RX	Surface	3	188	595	595	13.5	46	3.0
HE7247RX	Surface	4.5	188	595	595	13.5	47	3.3
HE7267RX	Surface	6	188	595	595	16.5	48	3.6

Dimensions (mm) and weight (kg)

Model No.	Type	kW	Depth	Width	Length	Weight	dBa	Optimum Ceiling Height (m)
HE7230SL	Recessed	3	175	595	595	7.5	46	3.0
HE7237SL	Surface	3	188	595	595	13.5	46	3.0

TOWEL RAILS

TRF & TRJ

Our toweldry towel rails deliver the luxury of warm, dry towels - all day, everyday - economically & safely. They are ideal for bathrooms, kitchens and laundries. The range offers models to suit individual needs including low surface temperature models suitable for retirement homes, hospitals and schools as well as domestic environments. The 30W towel rails comply with NHS Estates Health Guidance Notes and have a maximum surface temperature of 43°C when uncovered.

Key Features

- Adjustable wall brackets
- Very economical to run
- Fitted with 1m of supply cable
- Double Insulated Class II appliance, which eliminates the need for supplementary bonding
- IP24 rated
- Finished in white



Dimensions (mm) and weight (kg)

Model No.	kW	Height	Depth	Width	Weight
TRF30	0.03	425	86	465	1.5
TRJ40	0.04	415	86	465	1.5
TRJ60	0.06	665	86	495	1.9
TRJ80	0.08	875	86	540	2.6


PLINTH HEATERS

Wireless controlled: PHSL

Cleverly concealed in the 'kick space' beneath counters, displays, kitchen units, stairwells and fitted furniture, plinth heaters are suitable for both commercial and domestic environments.

Key Features

- 2kW or 3kW rating
- Compatible with any Consort wireless controller
- Easy installation and maintenance
- Minimum kick space height of only 100mm
- Automatic safety cut-out
- LED indicator light
- Fitted with 2.2m of supply cable
- Three different finishes

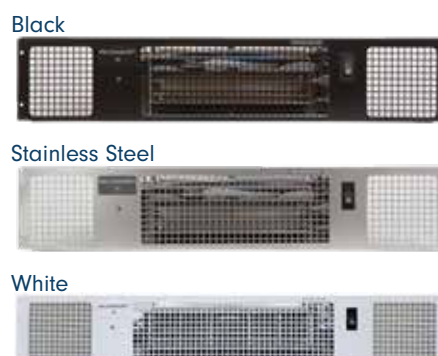

Safety monitoring feature for PHSL3 models

The heater's light will flash to indicate the nature of the fault.

		Types of Finish		
		Black	Stainless Steel	White
Model No.	2kW	PHSL2BL	PHSL2S	PHSL2W
	3kW	PHSL3BL	PHSL3S	PHSL3W

Dimensions (mm) and weight (kg)

kW	Height	Depth	Width	Weight	dBA
2	100	180	500	2.2	40
3	100	180	600	2.5	40

Note: Wireless controllers to be purchased separately.
Explore more at www.consortepl.com



COMMERCIAL FAN HEATERS

CFH3

Our 3kW commercial fan heaters provide comfort heating while working in garages and workshops.

Key Features

- 3kW rating
- Supplied with HRXSL controller
- Single phase only
- Option to select room temperature measurement on controller or on heater when used with HRXSL or optional CRXSL controller
- Electronic fault monitoring
- Instant directional warmth
- 1 fan speed, 3 heat settings
- Fan only setting for air circulation
- Wall mounted with multi-directional brackets supplied (180° horizontal, 45° vertical)
- Can be controlled by simpler SL controllers if required. This would, however, reduce the functionality.
- Finished in matt black



HRXSL Controller Energy Saving Features

- 6 temperature programmes per day
- 7-day heating programmes per week
- Maintains temperature within 0.5°C
- Set temperature in 0.5°C increments



Safety monitoring feature

The heater's light will flash to indicate the nature of the fault.

Dimensions (mm) and weight (kg)

Model No.	Optimum Mounting Height (m)	kW	Height	Depth	Width	Weight	Max dBA
CFH3	2 - 3.4	3	400	230	250	1.8	4.1



CH06CSiRX - CH12iRX

Our commercial fan heaters are ideal for providing comfort heat while working in areas such as garages, workshops, warehouses, factories and many other commercial applications.

Key Features

- 6kW, 9kW & 12kW ratings
- Requires a separately purchased CHMC, HRXSL, CRXSL or CRXSLWIFI wireless controller
- Single phase or 3 phase models
- Sensor to detect the room temperature
- Intelligent fan control feature
- Incorporates EC motor for improved energy efficiency
- Electronic fault monitoring
- One CRXSL controller can operate multiple heaters in single zone configuration
- One CHMC controller can operate a maximum of 8 heaters with individual control
- Time/Manual mode in CRXSL controller
- Option to select room temperature measurement on HRXSL or heaters
- 3 fan speeds, 3 heat settings with CRXSL (in Manual mode)
- 8 fan speeds, 8 heat settings with CHMC (in Manual Mode)



- Fan only setting for air circulation
- Wall mounted with multi-directional brackets supplied (180° horizontal, 45° vertical)
- Maximum heat throw – 11 metres at full speed
- Compatible with Building Management Systems
- Finished in white/grey

Safety monitoring & intelligent fan control features



The heater's light will flash to indicate the nature of the fault.



The fan automatically adjusts its speed based on the room temperature and heat output. This ensures warm airflow and prevents cold drafts.

Dimensions (mm) and weight (kg)

Model No.	Rating (kW)	Height	Depth	Width	Weight	Optimum Mounting Height (m)	Max dBA	Single / Single or 3 Phase
CH06CSiRX	6	272	338	332	11.5	2 - 3.4	59	Single
CH06CPiRX	6	272	338	332	11.5	2 - 3.4	59	3 phase
CH09iRX	9	272	338	332	11.5	2 - 3.4	59	3 phase
CH12iRX	12	272	338	332	11.5	2 - 3.4	59	3 phase

Commercial Heater Master Controller: CHMC

The CHMC controller is an optional controller for our commercial fan heater range and provides many energy-saving features.

Key Features

- Can control up to 8 heaters as a group or individually
- Can be located in different room to heaters
- Temperature sensor
- 8 fan speeds, 8 heat settings in Manual mode
- 2 operating modes: Manual and Temperature Control
- 7-day timer with 2 heating periods per day
- Fan only setting for air circulation
- Wi-Fi enabled for connection to Consort Connect app - App provides full functionality of CHMC remotely
- Compatible with Building Management Systems
- Electronic lock



TOP 5 BENEFITS:

- The electronic lock on CHMC prevents unwanted tweaking of temperature settings reducing energy wastage.
- As room temperature can be sensed at either CHMC, CHES or CH heaters, accurate temperature control can maintain heat levels with minimal energy waste.
- With CHES occupancy sensor, the heater will conserve energy when it detects no movement within a given range.
- Wi-Fi enabled for connection to Consort Connect app - App provides full functionality of CHMC remotely.
- Displays individual and total energy usage of heaters.



Consort Connect app

Dimensions (mm) & Weight (g)

Model No.	Height	Depth	Width	Weight
CHMC	86	53	146	145

Commercial Heater Environmental Sensor: CHES


An optional indoor sensor with the following features:

- Compatible with CHMC controller
- Occupancy sensor
- Temperature sensor
- Remote switch connection for BMS, On/Off function or Boost



MCBMS: Simple BMS Connection for CH heaters

- Offers two functions:
 - 1) BMS error reporting
 - 2) External remote or boost switch connection
- MCBMS must be used in conjunction with a CHMC controller and CH heaters when used as a switch
- BMS error reporting works on all Consort heaters as long as they have an RJ45 connector
- Remote switch connection for BMS, On/Off function or Boost




EXTRA WIDE AIR CURTAINS

CA1309S - CA2018S

Key Features

- Single/3 phase on CA1309S
- 3 phase only on CA1312S, CA15 and CA20 models
- Suspended or wall mounted installation
- Energy-efficient brushless motor
- Remote switch included (2 heat settings, 2 fan speeds)
- Optional smart controls, ACMC* (provide 8 heat settings, 8 fan speeds) & ACTS**
- Fan only setting for air circulation
- BMS (Building Management Systems) compatible

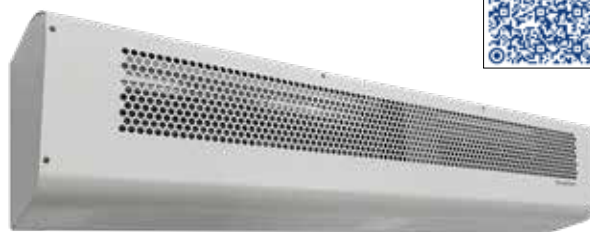

*ACMC (Air Curtain Master Controller)
**ACTS (Air Curtain Temperature Sensor)

Safety monitoring feature



The feature will detect and display the nature of the fault on the display screen of ACMC controller. If ACMC controller is not used, the LED indicator light located under the heater cover will flash indicating the nature of the fault.

Dimensions (mm) & Weight (kg)

Model No.	Rating (kW)	Height	Depth	Width	Weight	Max Mounting Height (m)	dBA
CA1309S	9	264	205	1305	18	3.4	60
CA1312S	12	264	205	1305	18	3.4	60
CA1509S	9	264	205	1530	20	3.4	60
CA1512S	12	264	205	1530	20	3.4	60
CA1514S	14	264	205	1530	20	3.4	60
CA1516S	16	264	205	1530	20	3.4	60
CA2015S	15	264	205	1970	25	3.4	60
CA2018S	18	264	205	1970	25	3.4	60

Note: 300mm clearance from ceiling required.

Air Curtain Master Controller: ACMC

Key Features

- Touchscreen control - Easy to use and set up
- Can control up to 7 air curtains with the same settings
- 8 heat settings, 8 fan speeds
- 4 operating modes: Manual, Automatic, Constant Temperature & Advanced Control
- 7-day timer for scheduled operation
- Energy monitoring - View usage over day, week, month and year
- Secure access - PIN code protection



Dimensions (mm)

Model No.	Height	Depth	Width
ACMC	86	53	146

Air Curtain Temperature Sensor: ACTS

Key Features

- ACTS is an external temperature sensor which can be used indoors or outdoors
- Can be used in conjunction with ACMC
- Enables the ACMC to optimise the fan and heat output to create an efficient optimal barrier and climate protection



SUSPENDED OR WALL MOUNTED AIR CURTAINS

Wireless controlled: HE7402RX, HE7420RX, HE8320RX, HE7426RX

Key Features

- 3kW, 4.5kW or 6kW rating
- Single phase
- Wall mounting bracket supplied for ease of installation and angular adjustment
- Suspended, wall or trunking mounted
- Compatible with CRXSL, CRXSLWIFI, HRXSL and LC controllers
- All controllers can operate multiple RX heaters
- Wireless controlled by a separately purchased advanced single zone controller
- Fan only setting for air circulation



Safety monitoring feature

The heater's light will flash to indicate the nature of the fault.

Dimensions (mm) & Weight (kg):

Model No.	Rating (kW)	Type	Max Mounting Height (m)	Height	Depth	Width	Weight	dBA
HE7402RX	3	Single door	2.3	210	115	634	5.1	46
HE7420RX	4.5	Single door	2.3	210	115	634	5.1	46
HE8320RX	4.5	Double door	2.3	210	115	1040	8.8	49
HE7426RX	6	Double door	2.3	210	115	1040	8.8	49

Note: 200mm clearance from ceiling required. dBA readings are taken at 3 meters from the heater in a free field environment.

Wireless controlled: HE8326RX, HE7433RX

Key Features

- 6kW or 9kW rating
- Single or 3 phase
- Wall mounting bracket supplied for ease of installation and angular adjustment
- Suspended, wall or trunking mounted
- Compatible with CRXSL, CRXSLWIFI, HRXSL and LC controllers
- All controllers can operate multiple RX heaters
- Wireless controlled by a separately purchased advanced single zone controller
- Fan only setting for air circulation
- Building Management System (BMS) compatible



Safety monitoring feature

The heater's light will flash to indicate the nature of the fault.



Dimensions (mm) & Weight (kg):

Model No.	Rating (kW)	Type	Max Mounting Height (m)	Height	Depth	Width	Weight	dBA
HE8326RX	6	Tall double door	2.3	210	115	1040	10.3	55
HE7433RX	9	Tall double door	2.3	210	115	1040	10.3	55

Note: 200mm clearance from ceiling required. dBA readings are taken at 3 meters from the heater in a free field environment.

HE7402 - HE7433

HE7402 • HE7420
SINGLE DOOR



HE8320 • HE7426
DOUBLE DOOR



HE8326 • HE7433
TALL DOUBLE DOOR



Key Features

- Single or 3 phase for HE8326 and HE7433
- Wall mounting bracket supplied for ease of installation and angular adjustment
- Suspended, wall or trunking mounted
- Fan only setting for air circulation
- Automatic safety cut-out for thermal overload protection
- Building Management System (BMS) compatible for HE8326 and HE7433
- Finished in white



Safety monitoring feature for HE8326 and HE7433

The heater's light will flash to indicate the nature of the fault.

Model No.	Type	Heat Settings	Fan Speeds	Fitted with Integral Switch	Remote Switch
HE7402	Single door	3		▪	Optional HE8407
HE7420	Single door	3		▪	Optional HE8407
HE8320	Double door	3		▪	Optional HE8407
HE7426	Double door	2		▪	Optional HE8407
HE8326	Tall double door	3	2		Supplied HE8408
HE7433	Tall double door	3	2		Supplied HE8408

Dimensions (mm) & Weight (kg):

Model No.	Rating (kW)	Max Mounting Height (m)	Height	Depth	Width	Weight
HE7402	3	2.3	210	115	634	5.1
HE7420	4.5	2.3	210	115	634	5.1
HE8320	4.5	2.3	210	115	1040	8.8
HE7426	6	2.3	210	115	1040	8.8
HE8326	6	2.3	210	115	1040	10.3
HE7433	9	2.3	210	115	1040	10.3

Note: 200mm clearance from ceiling required. dBA readings are taken at 3 meters from the heater in a free field environment.

RECESSED AIR CURTAINS

Wireless controlled: RAC0603RX, RAC0604RX, RAC1006RX

Key Features

- Compatible with CRXSL, HRXSL and LC controllers
- Single phase
- Will fit a recess as shallow as 210mm (155mm unit depth plus 55mm free air)
- Wireless controlled by separately purchased advanced single zone controller
- Fan only setting for air circulation
- Supplied with white grille



Safety monitoring feature

The heater's light will flash to indicate the nature of the fault.

Dimensions (mm) & Weight (kg)

Model No.	Rating (kW)	Max Mounting Height (m)	Depth	Width	Length	Weight
RAC0603RX	3	3	155	339	634	9.5
RAC0604RX	4.5	3	155	339	634	9.5
RAC1006RX	6	3	155	339	985	13.5

Wireless controlled: RAC1306RX

Key Features

- Compatible with CRXSL, HRXSL and LC controllers
- Single or 3 phase
- Will fit a recess as shallow as 230mm (175mm unit depth plus 55mm free air)
- Wireless controlled by separately purchased advanced single zone controller
- Fan only setting for air circulation
- Supplied with white grille



Safety monitoring feature

The heater's light will flash to indicate the nature of the fault.

Dimensions (mm) & Weight (kg)

Model No.	Rating (kW)	Max Mounting Height (m)	Depth	Width	Length	Weight
RAC1306RX	6	3.4	175	339	1350	20.0

RAC0603, RAC0604 & RAC1006

Key Features

- Single phase models
- Will fit a recess as shallow as 210mm (155mm unit depth plus 55mm free air)
- Supplied with HE8407 remote switch
- 3 heat settings
- Fan only setting for air circulation
- Automatic safety cut-out for thermal overload protection
- Supplied with white grille



RAC1306 - RAC1516

Key Features

- Will fit a recess as shallow as 230mm (175mm unit depth plus 55mm free air)
- Energy efficient brushless motor
- Supplied with HE8408 remote switch
- Multiple heaters can be controlled from one switch
- Optional ACMC (Air Curtain Master Controller) and ACTS (Air Curtain Temperature Sensor) available
- ACTS can be used in conjunction with ACMC
- 2 heat settings, 2 fan speeds with remote switch
- 8 heat settings, 8 fan speeds with optional ACMC
- Fan only setting for air circulation
- Automatic safety cut-out for thermal overload protection
- Building Management Systems compatible
- Finished in white



Safety monitoring feature



The feature will detect and display the nature of the fault on the display screen of ACMC controller. If ACMC controller is not used, the LED indicator light located under the heater cover will flash indicating the nature of the fault.

Quick feature guide to ACMC (Air Curtain Master Controller)

- Touchscreen control - Easy to use and set up
- Can control up to 7 air curtains with the same settings
- 8 heat settings, 8 fan speeds
- 4 operating modes: Manual, Automatic, Constant Temperature & Advanced Control
- 7-day timer for scheduled operation
- Energy monitoring - View usage over day, week, month and year
- Secure access - PIN code protection



Quick feature guide to ACTS (Air Curtain Temperature Sensor)

- ACTS is an external temperature sensor which can be used indoors or outdoors
- Can be used in conjunction with ACMC
- Enables the ACMC to optimise the fan and heat output to create an efficient optimal barrier and climate protection



Dimensions (mm) & Weight (kg)

Model No.	Rating (kW)	Max Mounting Height (m)	Depth	Width	Length	Weight	dBA	Single Phase	3 Phase
RAC0603	3	3	155	339	634	9.5	55	•	
RAC0604	4.5	3	155	339	634	9.5	55	•	
RAC1006	6	3	155	339	985	13.5	57	•	
RAC1306	6	3.4	175	339	1350	19.5	60	•	•
RAC1309	9	3.4	175	339	1350	19.5	60	•	•
RAC1312	12	3.4	175	339	1350	19.5	62		•
RAC1509	9	3.4	175	339	1550	21.0	62		•
RAC1512	12	3.4	175	339	1550	21.0	62		•
RAC1514	14	3.4	175	339	1550	21.0	62		•
RAC1516	16	3.4	175	339	1550	21.0	62		•

Note: dBA readings are taken at 3 meters from the heater in a free field environment.

Explore more at www.consortepl.com

Large commercial recessed air curtains: RAC10HL, RAC15HL & RAC20HL

Key Features

- 8 / 12kW, 12 / 18kW or 16 / 24kW rating, selectable at installation
- Supplied with electronic controller, external temperature sensor and RJ45 cable
- 415 volt 3 phase 50Hz
- Will fit a recess as shallow as 300mm
- Fan only setting for air circulation
- Multiple air curtains can be easily interconnected using CAT5/CAT6 RJ45 networking cable to resemble a continuous unit
- External temperature sensor can be used indoors or outdoors which enables the electronic controller to optimise the fan speed and heat output to create an efficient optimal barrier and climate protection
- Optional simple mechanical remote switch HE8408 available
- Supplied with hinged white non-vision grille



Safety monitoring feature

The feature will detect and display the nature of the fault on the display screen of ACMC controller.



Simple
installation



Easy
programming



8 heat
settings



8 fan
speeds



7-day
timer



BMS
compatible

Quick feature guide to ACMC (Air Curtain Master Controller)

- Touchscreen control - Easy to use and set up
- Can control up to 7 air curtains with the same settings
- 8 heat settings, 8 fan speeds
- 4 operating modes: Manual, Automatic, Constant Temperature & Advanced Control
- 7-day timer for scheduled operation
- Energy monitoring - View usage over day, week, month and year
- Secure access - PIN code protection



Quick feature guide to ACTS (Air Curtain Temperature Sensor)

- ACTS is an external temperature sensor which can be used indoors or outdoors
- Can be used in conjunction with ACMC
- Enables the ACMC to optimise the fan and heat output to create an efficient optimal barrier and climate protection



Dimensions (mm) & Weight (kg)

Model No.	Min-Max kW	Height	Depth	Width	Weight	Max dBA Full Speed	Max Mounting Height (m)
RAC10HL	8-12	270	515	1082	34	60	4
RAC15HL	12-18	270	515	1592	51	61	4
RAC20HL	16-24	270	515	2102	68	62	4

Note: dBA readings are taken at 3 meters from the heater in a free field environment.



Suspended or Wall Mounted Air Curtains Summary

Rating (kW)	Model	Control/ Switch	Max Mtg Height (m)	Height (mm)	Depth (mm)	Width (mm)	Weight (kg)	Heat Settings	Fan Speeds	dBA	Single/ 3 Phase
3.0	HE7402	✱	2.3	210	115	634	5.1	3	1	46	Single
3.0	HE7402RX	■	2.3	210	115	634	5.1		1	46	Single
4.5	HE7420	✱	2.3	210	115	634	5.1	3	1	46	Single
4.5	HE7420RX	■	2.3	210	115	634	5.1		1	46	Single
4.5	HE8320	✱	2.3	210	115	1040	8.8	3	1	49	Single
4.5	HE8320RX	■	2.3	210	115	1040	8.8		1	49	Single
6.0	HE7426	✱	2.3	210	115	1040	8.8	2	1	49	Single
6.0	HE7426RX	■	2.3	210	115	1040	8.8		1	49	Single
6.0	HE8326	●	2.3	210	115	1040	10.3	3	2	55	Single/3 Phase
6.0	HE8326RX	■	2.3	210	115	1040	10.3		2	55	Single/3 Phase
9.0	HE7433	●	2.3	210	115	1040	10.3	3	2	55	Single/3 Phase
9.0	HE7433RX	■	2.3	210	115	1040	10.3		2	55	Single/3 Phase
9.0	CA1309S	●	3.4	264	205	1305	18.0	3*	2*	60	Single/3 Phase
9.0	CA1509S	●	3.4	264	205	1530	20.0	3*	2*	60	3 Phase
12.0	CA1312S	●	3.4	264	205	1305	18.0	3*	2*	60	3 Phase
12.0	CA1512S	●	3.4	264	205	1530	20.0	3*	2*	60	3 Phase
14.0	CA1514S	●	3.4	264	205	1530	20.0	3*	2*	60	3 Phase
16.0	CA1516S	●	3.4	264	205	1530	20.0	3*	2*	60	3 Phase
15.0	CA2015S	●	3.4	264	205	1970	25.0	3*	2*	60	3 Phase
18.0	CA2018S	●	3.4	264	205	1970	25.0	3*	2*	60	3 Phase

- ✱ Fitted with integral switches with option for remote switch HE8407
- Supplied with remote switch
- ▲ Supplied with Electronic Controller and temperature sensor
- RX models require single zone controllers to operate



Recessed Air Curtains Summary

Rating (kW)	Model	Control/ Switch	Max Mtg Height (m)	Depth (mm)	Width (mm)	Length (mm)	Weight (kg)	Heat Settings	Fan Speeds	dBA	Single/ 3 Phase
3.0	RAC0603	●	3.0	155	339	634	9.5	3	1	55	Single
3.0	RAC0603RX	■	3.0	155	339	634	9.5		1	55	Single
4.5	RAC0604	●	3.0	155	339	634	9.5	3	1	55	Single
4.5	RAC0604RX	■	3.0	155	339	634	9.5		1	55	Single
6.0	RAC1006	●	3.0	155	339	985	13.5	3	1	57	Single
6.0	RAC1006RX	■	3.0	155	339	985	13.5		1	57	Single
6.0	RAC1306	●	3.4	175	339	1350	19.5	3*	2*	60	Single/3 Phase
6.0	RAC1306RX	■	3.4	175	339	1350	20.0		1	60	Single/3 Phase
9.0	RAC1309	●	3.4	175	339	1350	19.5	3*	2*	60	Single/3 Phase
9.0	RAC1509	●	3.4	175	339	1550	21.0	3*	2*	62	3 Phase
12.0	RAC1312	●	3.4	175	339	1350	19.5	3*	2*	62	3 Phase
12.0	RAC1512	●	3.4	175	339	1550	21.0	3*	2*	62	3 Phase
14.0	RAC1514	●	3.4	175	339	1550	21.0	3*	2*	62	3 Phase
16.0	RAC1516	●	3.4	175	339	1550	21.0	3*	2*	62	3 Phase
8.0/12.0	RAC10HL	▲	4.0	270	515	1082	34.0	8	8	60	3 Phase
12.0/18.0	RAC15HL	▲	4.0	270	515	1592	51.0	8	8	61	3 Phase
16.0/24.0	RAC20HL	▲	4.0	270	515	2102	68.0	8	8	62	3 Phase

* 8 heat settings, 8 fan speeds with optional ACMC.

Note: dBA readings are taken at 3 metres from the heater in a free field environment. For cable sizes, see page 47.

- ✿ Fitted with integral switches with option for remote switch HE8407
- Supplied with remote switch
- ▲ Supplied with Electronic Controller and temperature sensor
- RX models require single zone controllers to operate



IP55 WATERPROOF QUARTZZONE RADIANT HEATERS

QZWP15N, QZWP30N & QZWP45N

The QZWP is clean, silent, and odourless and is virtually maintenance free. These heaters are IP55 rated making them totally weatherproof. The running costs are very low, working out approximately one-third of the total running costs of gas systems. Ideal for heating a patio, terrace or an outdoor smoking area.

Key Features

- Can be wall or overhead mounted
- Weatherproof – IP55 rated
- Instant heat
- Ideal for outdoor use
- Lamp life of 5,000+ hours when used with the softstart
- Wall mounting brackets to allow heat to be directed
- Optional Softstart Control available - QSC3 or QSC6
- Fitted with 2.8m of supply cable
- 1.5kW model includes a parasol bracket
- Fitted guard included
- Replaceable lamp
- Finished in black

QZWP45N 4.5kW



QZWP15N 1.5kW



QZWP30N 3kW

The anodised aluminium reflector ensures the heat is directed to a specific area and the glass-free front ensures maximum thermal efficiency. These features make the heaters a significantly more environmentally friendly product for heating outdoor areas compared to gas heaters, which are far less efficient as much of the heat dissipates into the atmosphere.

Dimensions (mm) & Weight (kg)

Model No.	Rating (kW)	Height	Depth	Width	Weight	No. of lamps	Recommended Wall Mounted Height (m)
QZWP15N	1.5	120	125	480	1.7	1	2.3
QZWP30N	3	120	125	960	3.2	2	2.3
QZWP45N	4.5	120	125	1440	5.9	3	2.3

QUARTZZONE HALOGEN RADIANT HEATERS

HE7915, HE7920, HE7930 & HE7945

Quartzzone heaters use high-energy quartz halogen lamps to deliver instant, cost-effective radiant heat, ideal for large spaces where raising the overall temperature isn't practical. Their short-wave output, like sunlight, provides immediate warmth, reducing pre-heating time and running costs. Efficient anodised aluminium reflectors ensure a focused heat beam for targeted comfort.

Key Features

- 4.5kW model is suitable for single or 3 phase supply
- Ideal for high level use
- Fitted guard included
- Suitable for wall and ceiling mounting
- Angular and directional fixing bracket included
- Optional Softstart Control available - QSC3 or QSC6
- Gold lamps are available on request
- An optional humidity resistant lamp is available for use in damp buildings
- Finished in dove white

HE7915/HE7920 1.5kW/2kW



Dimensions (mm) & Weight (kg)

Recommended Mounting Height (m)

Model No.	Rating (kW)	Height	Depth	Width	Weight	No. of lamps	Wall mounted	Ceiling mounted
HE7915	1.5	230	120	450	3.1	1	2.5	3.0
HE7920	2.0	230	120	450	3.1	1	2.7	3.2
HE7930	3.0	435	120	450	5.9	2	3.0	3.6
HE7945	4.5	650	120	450	7.6	3	3.3	4.1

SOFTSTART CONTROLS

QSC3 & QSC6

The QSC3 and QSC6 are specifically designed to control the operation of up to 3kW and 6kW of quartz heating respectively. These controls provide a soft start when initially switching the quartz heaters on, thereby removing the surge of electricity normally associated with this type of heater. This will prolong the life span of the quartz lamps.

The softstart controls also incorporate a receiver function which provides users with the option to control a quartz heater with a wireless SL time control.

Key Features

- Can control up to 3kW or 6kW of quartz heating load
- Eliminates power on surge
- Prolongs quartz lamp life
- Can operate multiple quartz heaters (up to 3kW with QSC3 OR 6kW with QSC6)
- Weatherproof for outdoor use - IP65 rated
- Easy to install

QSC3



QSC6



Dimensions (mm) & Weight (kg)

Model No.	Loading capacity	Height	Depth	Width
QSC3	3kW	82	57	80
QSC6	6kW	90	61	158

Choice of wireless controllers for use in conjunction with softstart controls with receiver function enabled:

SLPB - Run-back timer and thermostat Allows heaters to operate only when the controller is activated. In Timer mode, the controller acts as a 4-stage run-back timer where heating period will be active until the run-back timer expires.	
SLPBWP - Waterproof run-back timer and thermostat The SLPBWP is IP65 rated making it ideal for outdoors, bathrooms and other wet areas. In Timer mode, the controller acts as a run-back timer where the heating period will be active until the run-back timer expires.	

Additional benefits when used in conjunction with optional SL controller:

- Saving energy by ensuring that the heaters are only on when you need them to be.
- Reduces installation wiring costs by eliminating the need for an extra cable connecting to a remote switch.

CERAMICZONE RADIANT HEATERS

Wireless Controlled: HE8515SL & HE8530SL

Ideal for medium to high level spot heating. These long-wave infrared heaters gently radiate energy directly onto the area and personnel to be heated.

Key Features

- 1.5kW or 3kW rating
- Compatible with any Consort wireless controller
- High radiant efficiency
- Fitted guard included
- Suitable for wall or ceiling mounting *
- Angular and directional fixing bracket included
- Supplied with 1m of high temperature cable
- Finished in dove white

* Must be angled down at 45°.

Dimensions (mm) & Weight (kg)

Model No.	Rating (kW)	Height	Depth	Width	Weight	Recommended Wall Mounting Height (m)	No. of Heat Emitters
HE8515SL	1.5	230	120	450	3.5	2.3	1
HE8530SL	3	359	120	450	6.7	2.7	2

Note: Wireless controllers to be purchased separately.





FROSTFIGHTERS UTILITY RADIANT HEATERS

UHA05 & UHA10S

Splash proof, tough and very economical, the frostfighters are designed specifically for use in locations such as lofts, boats, garages, caravans, toilets and cellars.

All models incorporate variable thermostatic control with frost protection setting, which can be set to operate when the ambient temperature falls below 5°C. They can either be used as a portable unit or permanently mounted in either vertical or horizontal position. Additionally the UHA10S has an independent fan to boost air circulation.

Key Features

- With integral thermostatic control
- Splash proof to IP24
- Variable thermostat with frost protection setting
- Robust construction
- Automatic safety cut-out
- Power-on neon indicator
- Fan only setting for air circulation on UHA10S
- Fitted cable
- Finished in barley white



Dimensions (mm) and weight (kg)

Model No.	Rating (kW)	Height	Depth	Width	Weight	With fan
UHA05	0.45	345	150	225	2.5	
UHA10S	1	345	150	225	2.9	✓

1.5kW/110V FANFAIR PORTABLE FAN HEATERS

PFH15T

Traditionally styled model with a robust steel body for durable good looks. It offers efficient and thermostatically controlled spot heating with directed airflow and a host of features.

Key Features

- 1.5kW rating at 110 volt
- Fitted with integral switches
- Fully variable thermostat with frost protection setting
- Half heat switching
- Automatic safety cut-out
- Power-on indicator
- Fan only setting for air circulation
- Fitted cable
- Finished in white



Dimensions (mm) and weight (kg)

Model No.	Rating (kW)	Voltage	Height	Depth	Width	Weight
PFH15T	1.5	110	110	190	300	2.1

SANFIRE SANITARY INCINERATOR

HE6820

Sanfire sanitary incinerators provide clean, hygienic and safe disposal of sanitary towels and small medical dressings. Adequate for up to 40 users and can be connected to a single or common flue system. Opening the charging door automatically switches on the heating element for a pre-set incineration time. Ash residue is simply removed from the lockable drawer. To aid installation an optional flue adaptor, HE6768, and a 600mm flue, HE6767, are available.

Key Features

- Safe, clean and hygienic
- Automatic operation
- Heavy-duty steel case
- Stainless steel incineration chamber
- Special sheathed wire element
- Power-on neon indicator
- Easy to install
- Ideal for disposal of sanitary towels and small medical dressings
- Finished in white



Model No.	Description
HE6768	Flue adaptor
HE6767	600mm flue

Dimensions (mm) and weight (kg)

Model No.	Rating	Height	Depth	Width	Weight
HE6820	550W	397	173	203	6.6



WIRELESS CONTROLLERS WITH WI-FI CAPABILITY

CRXSLWIFI

The CRXSLWIFI wireless controller has WIFI capability which when being used, connects any RX or SL heaters to the Consort Connect app. The app provides complete heating control remotely, with programming and energy saving features, including the ability to view energy consumption statistics in the last day, week, month and year.

Key Features

- Mains-powered
- Slim design and wall-recessed
- Compatible with all RX and SL heaters
- Quick and simple pairing to heaters
- Only works with 2.4GHz WiFi network
- Open window detection
- Large backlit LCD display for easy reading
- Electronic lock is available on the controller and the app
- The Consort Connect app features a 4-digit pin code lock to prevent accidental or unauthorised changes to settings. Users can unlock it via the app or the CRXSLWIFI controller.
- Fits onto standard double gang box



CRXSLWIFI Energy Saving Features

- Half heat when approaching target temperature for RX heaters only*.
- Maintains temperature within 0.5°C.
- Set temperature in 0.5 degrees increments.

Features and functions when being used with WiFi:

- 5 operating modes: Manual, Frost protection, Fan, Boost & Automatic timer.
- 15-minutes Boost feature providing maximum comfort quickly.
- 7-day timer with 24 heating periods per day.
- Ability to view energy consumption statistics on the app.
- Open window tracking and response capability.
- Comfort heat setting between 4°C to 35°C.
- Setback temperatures can be used for frost protection or maintaining a minimum room temperature 4°C to 15°C.

Dimensions (mm)

Model No.	Height	Depth	Width
CRXSLWIFI	85	34	145

* Half heat feature does not apply to 0.5kW & 0.8kW heaters.

SLPBWIFI

The SLPBWIFI wireless controller has WiFi capability which, when being used, connects SL Consort heaters to the Consort Connect app so that they can be remotely controlled. The Connect app provides complete heating control remotely, with programming and energy saving features, including the ability to view energy consumption statistics in the last day, week, month and year.

Key Features

- Can operate multiple SL heaters
- 1 operating mode with basic on/off function when being used without Wi-Fi
- Only works with 2.4GHz WiFi network
- With in-built occupancy sensor
- Easy operation
- Powered by 230 - 240V AC
- Fits onto most types of standard single gang boxes



Features and functions when being used with WiFi:

- 4 operating modes: Manual, Frost protection, Boost & Automatic timer.
- 15-minutes Boost feature providing maximum comfort quickly.
- 4 light indicators located around the button and blue indicator in the bottom corner showing status of the controller.
- 7-day timer with 24 heating periods per day.
- Self-learning control ability utilising occupancy and temperature sensors.
- Ability to view energy consumption statistics.
- Open window tracking and response capability.
- Create scenes and time/location based automations.
- Comfort heat setting between 4°C to 35°C.
- Setback temperatures can be used for frost protection or maintaining a minimum room temperature 4°C to 15°C.
- Lock function with 4-digit pin code to prevent accidental or purposeful changes to settings.

Dimensions (mm)

Model No.	Height	Depth	Width
SLPBWIFI	86	26	85

SL WIRELESS CONTROLLERS

The SLPB, SLVT, SLVTB and SLPBWP controllers are easy to install and set up. They can operate multiple SL heaters and have a run-back timer function which allows a heating cycle to be operational only when the controller is activated. Heating period will stay active until the run-back timer expires. Operating modes are set prior to the controller's installation. All controllers have easy-to-use control buttons.

SLPB

Key Features

- 3 operating modes:
 - Basic:** Switches the heater on and off when button is pressed
 - Timer:** Controller acts as a 4 stage run-back timer where heating period will be active until run-back timer expires
 - Temperature control:** Features temperature control for comfort and setback periods
- Setback temperatures can be used for frost protection or maintaining a minimum room temperature 0°C to 15°C



SLVT

Key Features

- Can set maximum comfort temperature
- Variable comfort control for user to adjust the temperature below the maximum comfort temperature
- 2 operating modes:
Temperature and Timer Control: Controller acts as a 4 stage run-back timer where heating period will be active until run-back timer expires. Target room temperature can be set using temperature control buttons.
Temperature Control: Features temperature control for comfort and setback periods
- Setback temperatures can be used for frost protection or maintaining a minimum room temperature between 0°C to 15°C



SLVTB

Key Features

- Powered by two 'AAA' 1.5V batteries
- 2 operating modes:
Temperature and Timer Control: Controller acts as a 4 stage run-back timer where heating period will be active until run-back timer expires. Target room temperature can be set using temperature control buttons.
Temperature Control: Features temperature control for comfort and setback periods
- Setback temperature can be used for frost protection or maintaining a minimum room temperature between 0°C to 15°C
- Display screen shows actual room temperature, except briefly when either of the two temperature control buttons are pressed, the new target room temperature is then temporarily displayed
- In Temperature and Timer mode, pressing the main button will briefly display time remaining. Pressing it again adds on the pre-set time segment to the run-back timer.
- Active heating mode is indicated by a letter displayed on the left side of the display screen:-
 - 't' - Displayed in run-back timer mode when the heating is active and flashes when comfort temperature is reached
 - 'h' - Displayed in standard mode when heating is activated and flashes when the comfort temperature is reached
- Can set maximum comfort temperature
- Variable comfort control for user to adjust the temperature below the maximum comfort temperature



RUN-BACK TIMER FUNCTION WITH SLPB, SLVT and SLVTB CONTROLLERS

4-stage run-back timer function

There is a choice of three time segments: 5, 15 or 30 minutes. When the main control button is pressed four times, the run-back time period is set to the maximum minutes of 20, 60 or 120.

	Button press x 1	Button press x 2	Button press x 3	Button press x 4
Time segments (minutes)	Heating period (minutes)	Heating period (minutes)	Heating period (minutes)	Heating period (minutes)
5	5	10	15	20
15	15	30	45	60
30	30	60	90	120



SLPBWP

Key Features

- IP65 rated
- 3 operating modes:
 - Basic:** Switches the heater on and off when button is pressed
 - Timer:** Controller acts as a run-back timer where heating period will be active until run-back timer expires
 - Temperature control:** Features temperature control for comfort and setback periods
- Comfort heat setting between 15°C to 35°C
- Setback temperatures can be used for frost protection or maintaining a minimum room temperature 0°C to 15°C
- 1 light indicator around the button to show the status of the controller



RUN-BACK TIMER FUNCTION WITH SLPBWP CONTROLLERS

SLPBWP Timer Mode with full heating periods

The SLPBWP is a waterproof run-back timer. It has a control button to activate a full heating period and heating remains active until the run-back timer expires.

Button press x 1	
Full heating period (minutes)	
	15
	30
	60

SUMMARY OF SL WIRELESS CONTROLLERS FEATURES



FEATURES	SLPB	SLVT	SLVTB	SLPBWP
	Run-back timer and thermostat	Run-back timer and adjustable thermostat	Battery-powered run-back timer and adjustable thermostat	Waterproof run-back timer and thermostat - IP65 rated
Compatible & operate multiple SL heaters	✓	✓	✓	✓
Mains or battery-powered	Mains	Mains	Battery	Mains
Choice of time periods (mins)	5, 15 or 30	5, 15 or 30	5, 15 or 30	
Full heating period (mins)	20, 60 or 120	20, 60 or 120	20, 60 or 120	15, 30 or 60
Adjustable thermostat		✓	✓	
Operating modes	3	2	2	3
Can set display for either Celsius or Fahrenheit		✓	✓	
Comfort heat setting	15°C to 35°C	15°C to 35°C	15°C to 35°C	15°C to 35°C
Frost protection	✓	✓	✓	✓
Maintain minimum room temperature	0°C to 15°C	0°C to 15°C	0°C to 15°C	0°C to 15°C
Fits onto most types of standard single gang boxes	✓	✓	✓	
Status light indicators	4	4	4	1
External input available to connect to any voltage free contact such as timers or BMS	✓	✓		✓
Can be powered by either mains 240V or 12VDC which allows SELV (Separated Extra Low Voltage) installation*	✓	✓		✓
Height x Depth x Width (mm)	86 x 26 x 85	86 x 26 x 85	86 x 26 x 85	81 x 57 x 83

* Power adapter not supplied

ADVANCED WIRELESS CONTROLLERS

1. SINGLE ZONE CONTROL



Effortlessly control your heating with our range of single-zone controllers designed for RX and SL heaters. Whether you're looking for wall-mounted solutions, portable convenience, or centralised control for multiple rooms, our controllers combine advanced features, energy efficiency, and sleek designs. The CRXSL, HRXSL, and LC controllers ensure precision heating tailored to your needs, making them perfect for homes, student accommodations, hotels, and more.

KEY FEATURES	CRXSL	HRXSL	LC*
Compatible with RX heaters	✓	✓	✓
Compatible with SL heaters	✓	✓	✓
Mains-powered	✓		✓
Battery-powered		✓ (includes 2 'AA' batteries)	✓
Battery backup	✓		
Operating modes	5	4	3
Comfort and setback temperature settings	✓	✓	✓
Open window detection	✓	✓	✓
15-minutes Boost function	✓	✓	
Electronic child lock	✓	✓	
Wall-mounted	✓	✓	✓
Signal Repeater			✓
Height x Depth x Width (mm)	85 x 34 x 145	141 x 20 x 54	89 x 23 x 136

*The LC controller can only be used in conjunction with the MLC master landlord controller which provides the programming and energy saving features. The MLC controller's features can be found on page 43.

Energy saving features for advanced controllers	CRXSL	HRXSL	LC
6 temperature programmes per day	✓	✓	✓
7-day heating programmes per week	✓	✓	✓
Half heat when approaching target temperature: For RX heaters only** or compatible heaters	✓ RX heaters	✓ Compatible heaters	✓ RX heaters
Maintains temperature within 0.5°C	✓	✓	✓
Set temperature in 0.5 degrees increments	✓	✓	✓
Reduce power consumption in standby mode			✓

** Half heat feature does not apply to 0.5kW & 0.8kW heaters.



CRXSL

Features

- Slim design and wall-recessed
- Fits onto standard double gang box

HRXSL

Features

- Option to select room temperature measurement on HRXSL or compatible heaters
- Supplied with security wall bracket

LC

Features

- Can be used as signal repeaters to extend the signal range
- An LC set as a repeater must be mains powered

2. MULTIZONE CONTROL

MRX1 - Multizone controller

Key Features

- Mains powered
- Touchscreen control
- 4 different operating modes: Boost, Manual, Setback (Economy) & Program
- 15-minutes Boost feature providing maximum comfort quickly with temperature control
- Option to limit min/max temperature
- Temperature display of either degrees Celsius or Fahrenheit



Energy saving features	MRX1
6 temperature programmes per day	✓
7-day heating programmes per week	✓
Half heat when approaching target temperature*	✓
Maintains temperature within 0.5°C	✓
Set temperature in 0.5 degrees increments	✓
Reduced power consumption in standby mode	✓

Dimensions (mm)

Model No.	Height	Depth	Width
MRX1	90	53	130


* Half heat feature does not apply to 0.5kW & 0.8kW heaters, or SL heaters.

Electronic 7-day timer heaters with RF heaters

These heaters are made to order. Each heater has the same features and functions as our Electronic 7-day timer heaters. Each heater has an RF receiver which communicates with the central control unit, MRX1 Multizone wireless controller**, and each MRX1 can control up to 8 heaters. The range includes:

- PLE-RF panel heaters
- LSTE-RF low surface temperature panel heaters

** Requires a separately purchased wireless controller.

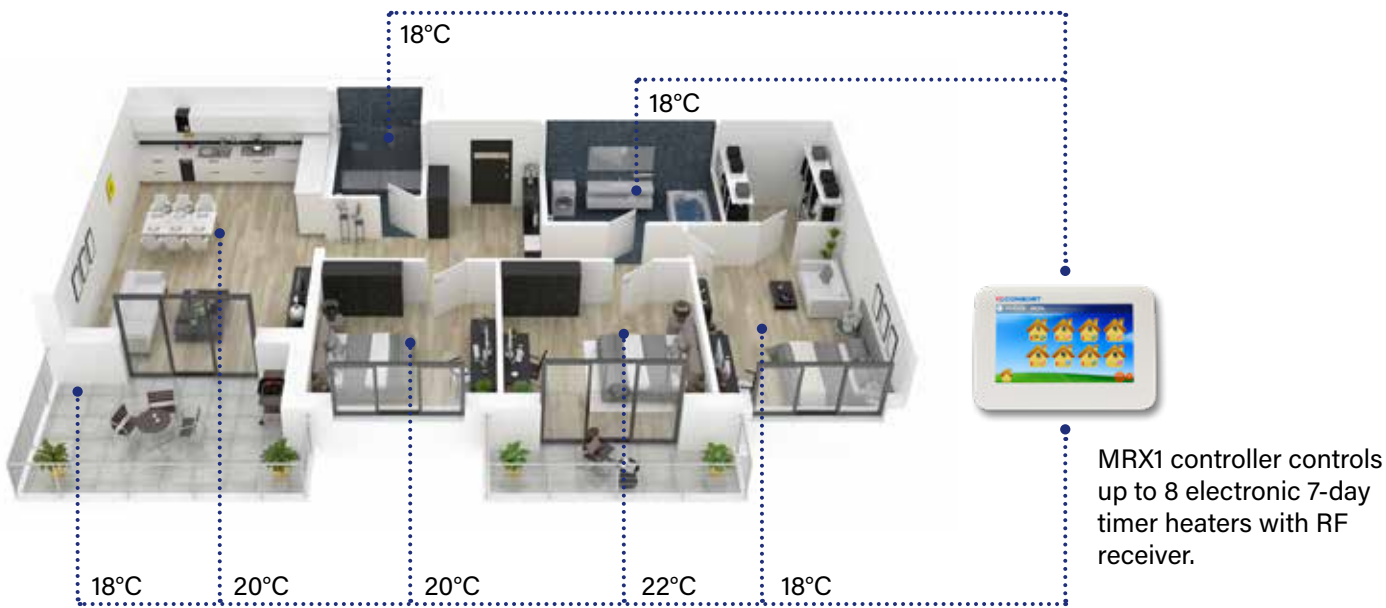

Central control with MRX1

The MRX1 controller can control up to 8 heating zones. Compatible with electronic 7-day timer heaters with an RF receiver.

Individual or group zone programming

A 7-day programme featuring 6 time periods a day which can be set separately for each zone or duplicated across other zones, if required, saving time. Temperature adjustments for all zones can also be done simultaneously.

Great energy and cost saving

With extensive heat control options and energy saving features, the MRX1 controller provides great energy and cost saving making it ideal for home or commercial property owners.





3. LANDLORD CONTROL

MLC - Master Landlord Controller

The Landlord Control heating system is ideal for student accommodations, hotels, B&Bs, hostels or anywhere where a central control unit is required to control the temperature of all heaters in a building or rooms.

Key Features

- Mains powered
- Controls an unlimited* number of LC controllers
- Sets the same 7-day programme and time for all LC controllers
- 2 operating modes:
 - 7-day programme
 - Constant temperature
- Option to limit min/max temperature
- Temperature display of either degrees Celsius or Fahrenheit




* Only limited by building construction.

Dimensions (mm)

Model No.	Height	Depth	Width
MLC	89	23	136

Energy saving features	MLC
6 temperature programmes per day	✓
7-day heating programmes per week	✓
Half heat when approaching target temperature for RX heaters only*	✓
Maintains temperature within 0.5°C	✓
Set temperature in 0.5 degrees increments	✓
Reduced power consumption in standby mode	✓

* Half heat feature does not apply to 0.5kW & 0.8kW heaters.

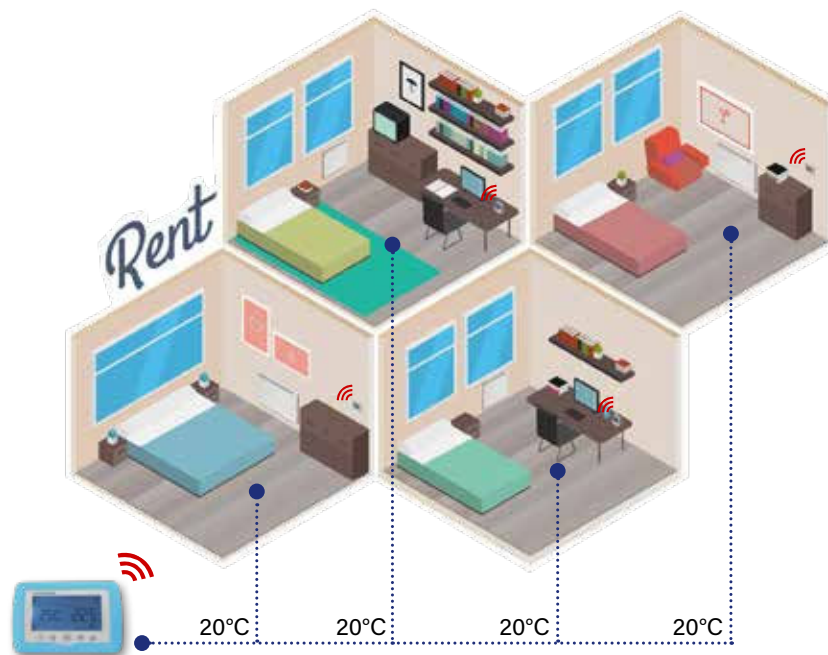

MLC controller controls temperature of all heaters in a building via LC controllers.

Simplicity

The MLC is simple to set up and easy to programme.

Total control

The MLC sets the same 7-day programme and time for all LC controllers.

Flexibility

Room occupants can temporarily adjust the room temperature via the LC for a predetermined length of time before the LC reverts to the programmed temperature.

Savings

Provides landlords with greater control over their heating system and costs through MLC energy saving features.

RECEIVER UNIT & RANGE EXTENDER


SLEXT

As a receiver unit, the SLEXT enables certain heaters to be wirelessly controlled by a CRXSL, HRXSL or SL controller. With SLEXT installed, a CRXSL or SL controller expands the heating control options to include temperature and time control.

As a range extender, the SLEXT extends the RF signal range SL heaters that are not close enough to receive wireless transmission. It is surface mountable and easy to install.

Key Features

- Mains powered
- Can control a load up to 3kW
- Maximum switching current 13A/250V
- Can be retrofitted
- Each heater must be connected to an SLEXT for it to be controlled by a CRXSL, HRXSL or SL controller
- Can double the range of all SL, CRXSL or HRXSL controllers

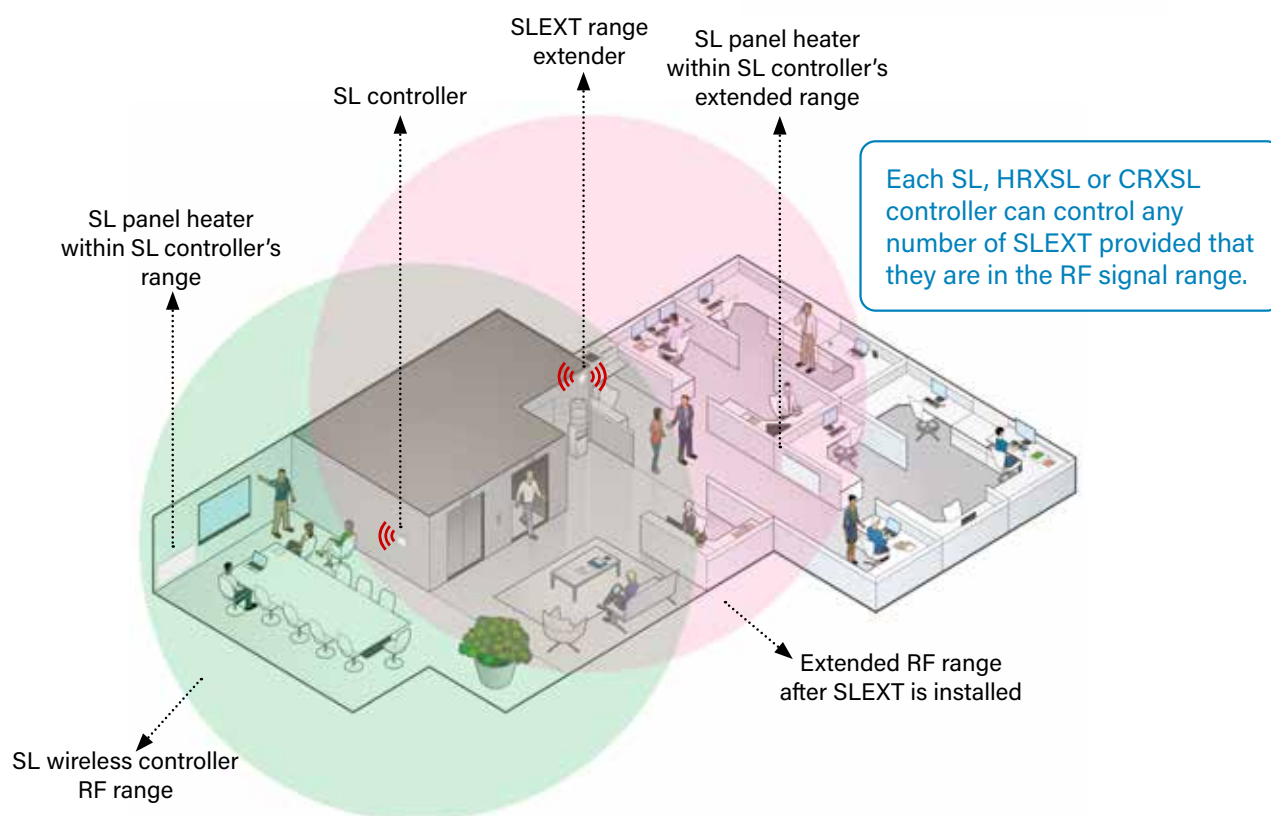

Note: The illustration above is to show the function of an SLEXT range extender only. The location of the SL controller, range extender and heaters is not intended as a recommended placement.

Poor wireless transmission is caused by barriers such as walls or metal objects; or where a controller is mounted close to power cables, motors or equipment producing a strong electromagnetic field. With the SLEXT, the RF signal is repeated, thus extending the reach to heaters in an area or building.

Dimensions (mm)

Model No.	Height	Depth	Width
SLEXT	82	57	80



INSTALLATION PLANNING

Consort Claudgen has extensive experience in supplying complete heating packages for industrial, commercial, retail, and amenity spaces. We offer a Free Advisory Service with technical guidance for planning heating schemes.

Our website features practical tools which help simplify planning, improve energy efficiency, and ensure the best results:

- 1) Heating Scheme Calculator: Identifies the most efficient heating solution based on insulation, layout, and location.
- 2) Air Curtain Selector: Recommends the ideal air curtain by entering door dimensions and preferences.

The following information is provided to help in planning the most efficient heating for each installation. As requirements can be affected significantly by factors such as activity levels, ambient conditions, building structure, efficiency and weather-proofing, the information should be regarded as a general guide.

Which heater?

This will depend on the nature, use and design of the interior, and one type or a mixture of products may be used. In general, fan-forced heaters and convectors are employed as space heaters, and radiants where more localised heat or immediate all-over warmth is required.

Radiant heating

Ceramiczone and Quartzzone heaters are specified where there is a need for localised heat or immediate, all-over warmth. Applications include commercial and industrial premises that are lightly constructed, naturally cold and perhaps infrequently used. They are also ideal for premises where staff occupy only small parts of a large area, such as warehouses, stores and workshops. To estimate the approximate total heating load needed in kilowatts (kW), use the following formula;

$$\text{Installed Load (kW)} = (\text{A} \times \text{F}) / 1000$$

where: A = floor area in square metres and F = appropriate heating factor from the following table;

Type of Building	Heating Factor F (Watts/sq.m)
Sports Hall	110-130
Shops and Supermarkets	130-160
Offices and Canteens	140-170
Workshops and Garages	150-180
Halls with some activity	160-200
Warehouses	170-210
Halls with little activity	180-220
School Halls	200-260
Churches	220-280

The lower figures relate to a well insulated building with few draughts, the higher figures being more appropriate for older buildings with insulation below modern standards. This table takes account of the different heating requirements of these premises for example, a church is assumed to need rapid heating from cold, for sedentary and perhaps elderly occupants, and as such has a higher recommendation than a sports hall.

Siting

For optimum absorption of radiant heat by occupants, heaters should be positioned so that heat reaches them at an angle of 45 degrees and schemes should be planned if possible so that the area to be heated is effectively covered by heaters which are all mounted at or close to this angle.

Noise level

Throughout our catalogue we have referred to the dBA Level of various fan heaters. The dBA level was recorded three metres from the product. To aid you in determining how quiet our products are, we have listed below some comparative noise levels:

- * 30dB Whisper
- * 50dB Rainfall
- * 60dB Normal Conversation

Cable requirements to remote switch

Model No.	Output (kW)	No of wires	Nominal Wire size (mm²)	Mains supply	
				Single phase	Three phase
Screen Zone					
HE7402	3.0	4+earth	1.5	●	
HE7420	4.5	4+earth	2.5	●	
HE7426	6.0	4+earth	4.0	●	
HE7433	9.0	5+earth	0.5	●	●
HE8320	4.5	5+earth	0.5	●	
HE8326	6.0	5+earth	0.5	●	●
CA1309S	9.0	5+earth	0.5	●	●
CA1312S	12.0	5+earth	0.5		●
CA1509S	9.0	5+earth	0.5		●
CA1512S	12.0	5+earth	0.5		●
CA1514S	14.0	5+earth	0.5		●
CA1516S	16.0	5+earth	0.5		●
CA2015S	15.0	5+earth	0.5		●
CA2018S	18.0	5+earth	0.5		●
RAC10HL	8.0 / 12.0	RJ45*			●
RAC15HL	12.0 / 18.0	RJ45*			●
RAC20HL	16.0 / 24.0	RJ45*			●
RAC0603	3.0	4+earth	1.5	●	
RAC0604	4.5	4+earth	2.5	●	
RAC1006	6.0	4+earth	4.0	●	
RAC1306	6.0	5+earth	0.5	●	●
RAC1309	9.0	5+earth	0.5	●	●
RAC1312	12.0	5+earth	0.5		●
RAC1509	9.0	5+earth	0.5		●
RAC1512	12.0	5+earth	0.5		●
RAC1514	14.0	5+earth	0.5		●
RAC1516	16.0	5+earth	0.5		●

Wire size in accordance with Requirements for Electrical Installations BS 7671:2018.

* It is essential that the electronic controller supplied with these products is wired with good quality screened cable 1.0mm² max.



DELIVERING
EXCELLENCE
THROUGH
INNOVATION

Consort Equipment Products Limited

Thornton Industrial Estate
Milford Haven, Pembrokeshire, SA73 2RT
Telephone: +44 (0)1646 692172
Sales email: sales@consortepl.com
Technical email: technical@consortepl.com
Web: www.consortepl.com



Consort is an independent British manufacturer and has been based in Milford Haven, Pembrokeshire, Wales since 1966. In addition to electric heaters, Consort also produce a wide range of crossflow fans for use by other manufacturers around the world in a variety of products. Our extensive modern sheet metal facility also allows us to offer subcontract manufacturing to a number of companies.



Product Specifications

Reasonable care has been taken to ensure the description, specification and product finishes are as accurate as possible at the time of printing. In the interest of progress the Company reserve the right to vary specifications from time to time without notice.

Installation Guidance

This brochure is not intended as an installation guide. Electrical installation should be carried out by a competent installer, preferably registered with NICEIC (National Inspection Council for Electrical Installation Contracting) in accordance with the latest edition of the IEE Wiring Regulations, (BS.7671), and any relevant Local Authority Bye-Laws. If you require further advice concerning the installation of our products – especially where the installed dimensions may be critical to your choice and the location of the product – please consult your installer. Please note that the dimensions contained within this brochure do not in all cases include clearances required around installed products for safe operation.

Compliance

Consort Claudgen's heaters have been designed and manufactured to the highest international standards, however, care must be taken for optimal results and safety. The heaters also meet the requirements of UK and EU Directives.

Safety & Care

Consort heaters are not intended for use by persons (including children) with reduced physical, sensory or mental capabilities or lack of experience and knowledge unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the heaters.

Website

Our website provides useful information including:

- User instructions and data sheets current products
- Latest brochures and trade price list
- Frequently asked questions
- Heating calculator
- Spare parts
- Latest news

Discontinued Products

The installation/operating guides for our discontinued products are available upon request. You can contact us at 01646 692172 or email: technical@consortepl.com.

For more information and copies of the Heat brochure, please:
visit: www.consortepl.com, email: sales@consortepl.com or call: 01646 692172

For spares, please visit our website under Spares or email the details to spares@consortepl.com

© Consort Claudgen. Heat Brochure 2026. All rights reserved. Material contained in this publication may not be produced in whole or in part without prior permission in writing from Consort Claudgen.

