


PLSTiE Slimline LST Fan Heaters with WiFi

These heaters connect directly to WiFi and can be controlled either from the integral electronic 7-day timer or via Consort Connect app which provides complete control remotely. The app is free and can be downloaded from Google Play or Apple Store. It provides the same control features as the digital control panel on the heater and is simple to set up. With the app, users can configure settings of all connected heaters and view energy usage in the last day, week, month and year.

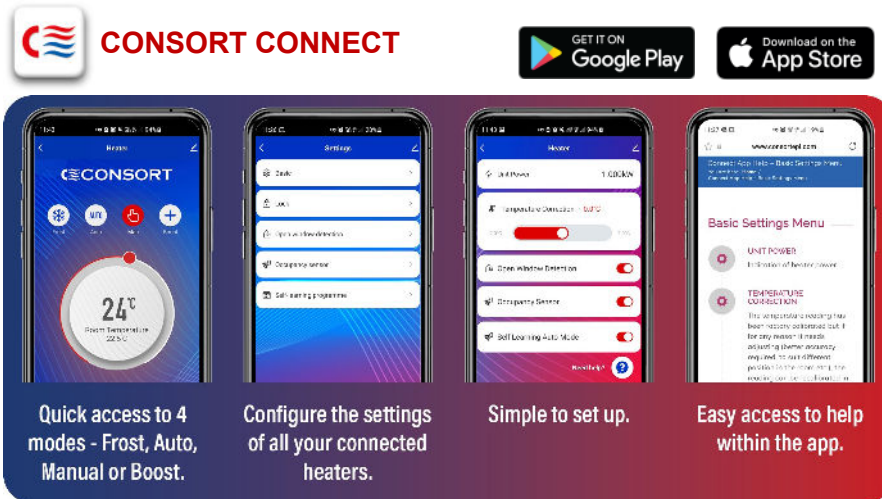

- 0.5kW, 0.75kW, 1kW or 1.5kW rating.
- Can be controlled from digital control panel on the heater or via Consort Connect app on smartphone or tablet.
- Safety monitoring: In the unlikely event of a fault, the safety monitoring system helps prevent high surface temperatures. The heater's light will flash to indicate the nature of the fault.
- Intelligent fan control: The fan automatically adjusts its speed based on the room temperature and heat output. This ensures warm airflow and prevents cold drafts.
- Incorporates EC motor for improved energy efficiency
- Maximum surface temperature of 43°C to comply with NHS Estates Health Guidelines Notes
- 7-day timer with 24 heating periods per day.
- Ability to view energy consumption statistics.
- Open window tracking and response capability.
- Copy day function.
- 4 operating modes: Programme, Boost, Setback & Manual.
- Boost option for up to 4 hours in 15-minutes steps.
- Comfort heat setting between 15°C to 35°C.
- Setback temperatures can be used for frost protection or maintaining a minimum room temperature between 4°C to 15°C.
- Maintains temperature within 0.7 degrees.
- Easy operation.
- Lock function with 4-digit pin code to prevent accidental or purposeful changes to settings.
- Slimline and clean design.
- Strengthened grilles to increase durability.
- Quiet operation.
- Concealed digital controls on heater.
- Digital control panel has easy-to-read display and 4 large control buttons with tactile feedback.
- Splash proof to IP24 for use in bathrooms and other damp areas.
- Hinged wall mounting system for easy installation and decorating.
- Optional control panel locking kit (PLK1).
- Automatic safety cut-out.
- Fitted with 1.1m of supply cable.
- Finished in white.

Dimensions (mm) & Weight (kg):

Model No.	Rating (kW)	Height	Depth	Width	Weight
PLSTi050EWIFI	0.5	430	93	506	4.5
PLSTi075EWIFI	0.75	430	93	506	4.5
PLSTi100EWIFI	1	430	93	640	6.0
PLSTi150EWIFI	1.5	430	93	892	8.0