


Screenzone Recessed Air Curtains - RAC1306, RAC1309, RAC1312, RAC1509, RAC1512, RAC1514 & RAC1516

6kW, 9kW, 12kW, 14kW & 16kW

Designed to fit above a doorway in a suspended ceiling, the Recessed Screenzone provides a discreet welcoming curtain of warmth for doorways in shops, hotels, offices and commercial premises. Overall energy savings are likely when the heater is sited above a frequently opened external door as the airstream can prevent heat loss.

- 6kW, 9kW, 12kW, 14kW or 16kW rating
- Will fit a recess as shallow as 230mm (175mm unit depth plus 55mm free air)
- Energy efficient brushless motor.
- Supplied with HE8408 remote switch.
- Multiple heaters can be controlled from one switch.
- Optional ACMC (Air Curtain Master Controller) and ACTS (Air Curtain Temperature Sensor) available.
- ACTS must be used in conjunction with ACMC.
- 2 heat settings, 2 fan speeds with remote switch.
- 8 heat settings, 8 fan speeds with optional ACMC.
- Fan only setting for air circulation.
- Automatic safety cut-out for thermal overload protection.
- Safety monitoring feature: This feature will detect and display the nature of the fault on the display screen of ACMC controller. If ACMC controller is not used, the LED indicator light located under the heater cover will flash indicating the nature of the fault.
- Compatible with Building Management Systems.
- Finished in white.

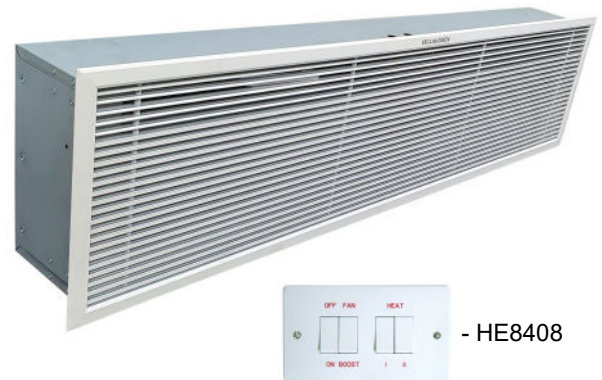

Dimensions (mm) & Weight (kg):

Model No.	Depth	Width	Length	Weight
RAC1306 / RAC1309 / RAC1312	175	339	1350	19.5
RAC1509 / RAC1512 / RAC1514 / RAC1516	175	339	1550	21.0

Model No.	kW	Max Mounting Height (m)	dBA	Single Phase	3 Phase
RAC1306	6	3.4	60	•	•
RAC1309	9	3.4	60	•	•
RAC1312	12	3.4	62		•
RAC1509	9	3.4	62		•
RAC1512	12	3.4	62		•
RAC1514	14	3.4	62		•
RAC1516	16	3.4	62		•

Note: dBA readings are taken at 3 meters from the heater in a free field environment.