



HEATED LADDER TOWEL RAIL

INSTALLATION AND OPERATING MANUAL

CATALOGUE NUMBERS:

LTR200CH LTR400CH

LTR200AN LTR400AN

All electrical appliances produced by the Company are guaranteed for one year against faulty materials or workmanship. This applies only if the appliance has been used for purposes in accordance with the instructions provided and has not been connected to an unsuitable electricity supply, or subject to misuse, neglect, damage or modified or repaired by any person not authorized by us. This guarantee is offered to you as an extra benefit and does not affect your legal rights.

The correct electricity supply voltage is shown on the rating label attached to the appliance.

Reasonable care has been taken to ensure that this guide is accurate at the time of printing.

Warning

- Clearance distance shall be followed.
- Do NOT use the appliance if damaged.
- Do NOT leave the appliance unattended where young children are present.

If the supply cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard. This towel rail has been pre-filled and adjusted for electrical standalone use.

Health and Safety

The appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities or lack of experience and knowledge unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.

Specification

Supply: 230-240 Volts AC, 50 Hz, single phase

Connection to the Main Supply

Electrical installation should be carried out by a competent installer, preferably registered with NICEIC (National Inspection Council for Electrical Installation Contracting) in accordance with the latest edition of the IEE Wiring Regulations, (BS.7671), and any relevant Local Authority Bye-Laws. This heater is fitted with a 3-core mains supply cable and must be permanently connected to the electricity supply via a double pole switch having 3mm gap on each pole.



There are no exceptions.



A switched Fused Connection unit to BS.1363. Part 4 is a recommended mains supply connection accessory to ensure compliance with safety requirements applicable to fixed-wiring installation.

WARNING: This appliance must be earthed.

Location

The appliance is designed for bathroom use and is IPX4 rated. When installed in a bathroom, the towel rail must **not** be connected via a plug and socket. The towel rail must also be located in zone 2 or beyond of the bathroom, in accordance with Section 701 of the latest edition of BS 7671.

Cleaning

Always disconnect the heater from the mains before cleaning. The heater should not require any maintenance, but it is strongly advised that it is kept clean. An occasional wipe over with a soft cloth is all that should be necessary.

- Do NOT use metal or furniture polish on any part of the heater.

If Your Heater Does Not Work

- Check that power is available to the heater.
- Check that the fuse in the spur unit has not blown. This can be done by replacing the fuse with another suitable fuse.

Should none of the above remedies work, then telephone the helpline number shown in these instructions (UK ONLY). Do not attempt to repair the heater.

Mounting

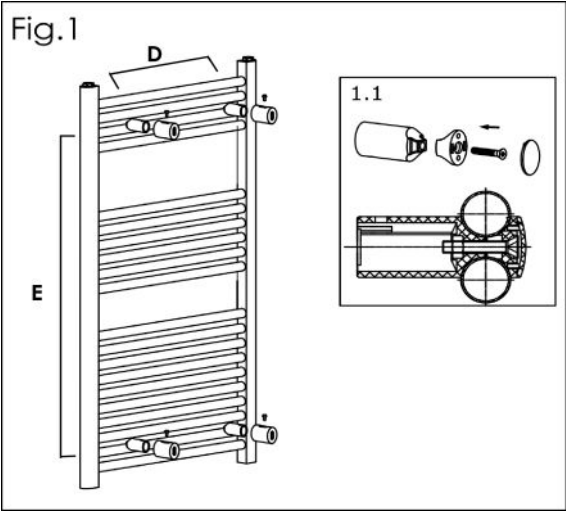


Fig.1
1.1 Loosely fit the bracket stems to the towel rail with the bracket fronts with the M6 bracket screws, and ensure the M5 entry holes are pointing outwards.

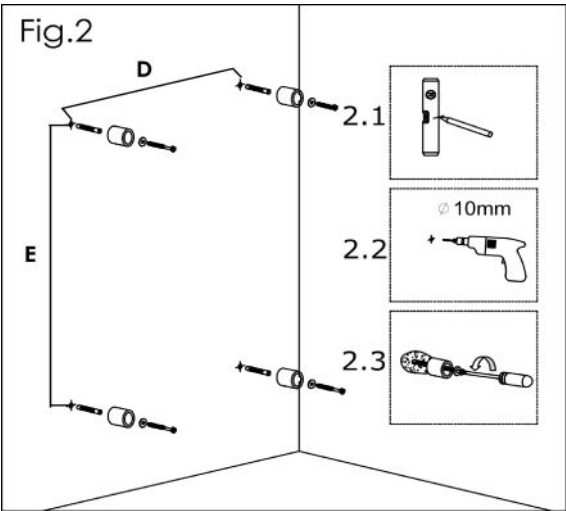


Fig.2
2.1 Mark your preferred bracket position on the wall within the measurements in the table below.

	LTR200CH LTR200AN	LTR400CH LTR400AN
D	360mm	360mm
E	600mm	1000mm

2.2 Drill holes for the wall plugs and insert them.
2.3 Screw the bracket bases to the wall, ensure the washer is used.

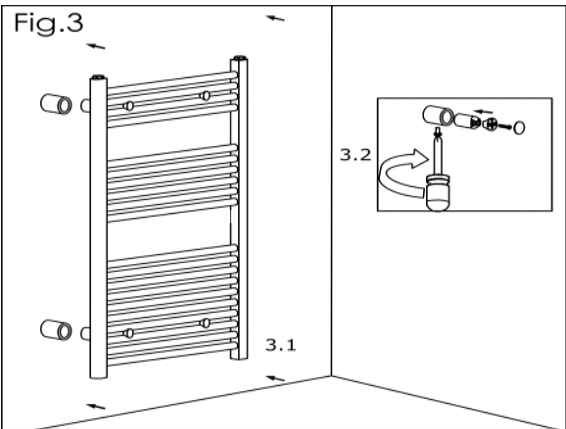


Fig.3
3.1 Align the bracket stems with the bracket bases and push the towel rail into position ensuring the mains cable is located at the bottom.

3.2 Tighten M5 screw into the bracket stems to secure the towel rail.

3.3 Tighten M6 bracket screws mentioned in **1.1**.

3.4 Push in the screw cover caps to the bracket fronts.

	LTR200CH LTR200AN	LTR400CH LTR400AN
Dimensions	800 x 500 mm	1200 x 500 mm

Declaration Of Conformity

In accordance with UK Government Guidance.

WE HEREBY CERTIFY THAT THE APPLIANCES DETAILED HEREON HAVE BEEN INSPECTED AND TESTED, AND CONFORM TO THE REQUIREMENTS OF THE FOLLOWING UK STATUTORY INSTRUMENTS WHERE APPLICABLE:

Electrical Equipment (Safety) Regulations 2016 SI. 2016 1101

Electromagnetic Compatibility Regulations 2016 SI. 2016 No. 1091

Radio Equipment Regulations 2017 SI. 2017 No. 1206

The Ecodesign for Energy Related Products and Energy Information (Amendment) (EU Exit) Regulations 2019. SI. 2010 2617

The Restriction of use of Certain Hazardous Substances. SI. 2012 No. 3032

The Supply of Machinery (Safety) Regulations 2008 (SI 2008/1597)

The Waste Electrical and Electronic Equipment Regulations 2013. SI. 2013 No. 3113

Security Requirements for 'Connectable Products' PTSI Act 2022

The Product Security and Telecommunications Infrastructure (Security Requirements for Relevant Connectable Products) Regulations 2023

Transposed standards used:

- **BS EN 55014-1:2021**
- **BS EN 301 489-1 & -3**
- **BS EN 300 220-1 & -2**
- **BS EN 60730-2-9:2019**
- **BS EN 60335-1:2012 + A15:2021**
- **EN 60335-2-30:2009 + A1:2020**
- **ETSI EN 303 645 V2.1.1 (2020)**

PART NUMBER AND DESCRIPTION OF APPLIANCE:

LTR200CH, LTR200AN, LTR400CH, LTR400AN

NAME OF RESPONSIBLE PERSON:

DAVID O'SULLIVAN

POSITION:

OPERATIONS MANAGER

DATE:

08/04/26



FM 12671

CONSORT EQUIPMENT PRODUCTS LTD.

THORNTON INDUSTRIAL ESTATE, MILFORD HAVEN, PEMBROKESHIRE, SA73 2RT. UK
TEL: +44 1646 692172 FAX: +44 1646 695195. E-MAIL: ENQUIRIES@CONSORTEPL.COM
WWW.CONSORTEPL.COM